

## TAUCHPUMPEN



**New Version**  
**Lowest suction**  
**1 mm**




### KILA 250 - lowest suction - 270w - 230 v / 50 Hz


The new submersible pumps KILA LOWEST SUCTION, with the new special body for minimum level suction is fruit of the careful study and re-project of the hydraulic circuit of the standard KILA.

- Available in the same KILA 250 pump casing - 270W - 230V/50HZ
- New version available in both MANUAL and GI INCORPORATED FLOAT execution
- Suitable for clean water containing particles up to 1 mm diameter
- It can pump out water down to 1 mm
- In the manual position the pump is self-priming starting from 1mm water level
- Provided as standard components with SPECIAL FIXING FEETS, which give you the possibility to rise the pump body of approximately 4-5mm for passage of solids up to of 4-5mm diameter.


Hydraulic characteristics of the 1mm lowest suction version are slightly lower than the normal versions

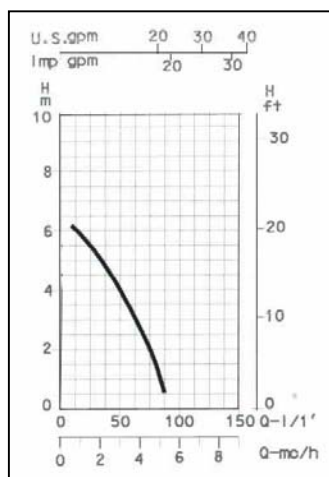

**LOWEST SUCTION  
VERSION 1 mm**

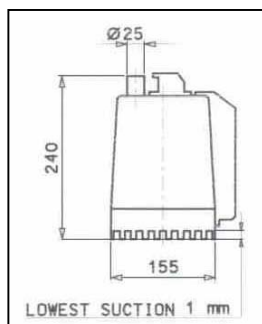

**NORMAL  
VERSION 4,5 mm**

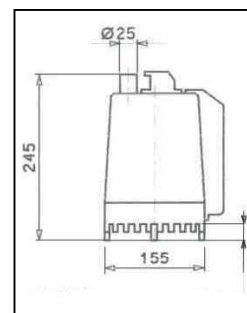

SIMACO reserves the right to make modifications without prior notice



**Fluid moving technology**

**SIMACO ELETTROMECCANICA s.r.l.**